



# Reveal Merchandiser® ORMC(75/80)(L/M)-MX Specs

Open Multi-Decks (75" or 80" Height)

ORMC(75/80)(L/M)-MX: (L=Low, M=Medium Sill Height)-MX=Meat exclusive

## Energy Data

### REFRIGERATION

	LINEUP DATA	INDIVIDUAL CASE DATA (Includes 1 Pair of End Panels)			
	Per Foot Avg.	4'	6'	8'	12'
Evaporator Temperature (°F) <sup>1,2</sup>	27	27	27	27	27
Baseline Btuh <sup>3,4</sup>	1,365	5,982	8,801	11,504	16,911
Discharge Air Temp. (°F) (w/ 6-8°F Superheat) <sup>5</sup>	33	33	33	33	33
Discharge Air Velocity (fpm) <sup>6</sup>	230	230	230	230	230
Btuh Deducts	Btuh/ft	Btuh	Btuh	Btuh	Btuh
Low Sill with Glass Front	-100	-400	-600	-800	-1,200
Medium Sill	-40	-160	-240	-320	-480
Medium Sill with Glass Front	-140	-560	-840	-1,120	-1,680
Btuh Adders	Btuh/ft	Btuh	Btuh	Btuh	Btuh
Canopy LED (Zero Zone ChillBrite™) 2nd Row	13	52	78	104	156
Under Shelf LED (Zero Zone ChillBrite™) Per Row	10	40	60	80	120

### ELECTRICAL DATA <sup>7</sup>

	Per Foot Avg.		4'		6'		8'		12'	
	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
Fan Motors (115V)										
High Efficiency Electronic (ECM)	0.11	7.7	0.60	42	0.60	42	0.90	63	1.20	84
Lighting System (115V)										
LED Lighting (Zero Zone ChillBrite™) Per Row Canopy	0.047	5.8	0.19	23	0.28	35	0.38	46	0.56	69
LED Lighting (Zero Zone ChillBrite™) 1-Row Sill	0.023	2.9	0.09	12	0.14	17	0.19	23	0.28	35
LED Lighting (Zero Zone ChillBrite™) Per Row Under Shelf	0.012	1.5	0.05	6	0.07	9	0.10	12	0.14	17

**Notes:**

- For high-glide refrigerants, use dew point for unit sizing. Adjust evaporator pressure as needed to maintain discharge air temperatures.
- Evaporator temperatures listed above are for unlit shelves. Evaporator temperatures may need to be reduced for lit shelves or aftermarket display accessories.
- Baseline Evaporator Btuh based on parallel rack system, 1 Row LED canopy lighting (Zero Zone ChillBrite™), ECM electronic fan motors, 4 rows of angled and tiered shelves, and Low sill height.
- For condensing units (non-rack system), multiply total Btuh rating by 1.08.
- Discharge air temperature is measured at the outlet of the honeycomb.
- Discharge air velocity is average velocity at peak of defrost.
- Amps are based on electrical nameplate values, watts are based on laboratory observations of actual energy use.

**Case Performance Notes:**

- Btuh load increases by approximately 120 Btuh/ft for aftermarket shelving/merchandising.
- Operating temperature and defrost set points may need to be adjusted for alternate shelving, store conditions, or packout.
- A minimum 20° evaporator is recommended without positive defrost.

## Operating Set Points

Off-Cycle Defrost	Time Per Defrost (Min.)	Drip Time (Min.)	EPR Settings (psig)
4 Per Day (R-404A)	36	N/A	65
6 Per Day (R-448A)	30	N/A	57

## Physical Data


Baseline R-404A Refrigeration Piping	Outlet Size (in.)	Case Length	Weight (lbs.)
Suction Line O.D. (Top Refrig. 4' & 6' Cases)	5/8	4'	452
Suction Line O.D. (Top Refrig. 8' & 12' Cases)	7/8	6'	678
Liquid Line O.D.	3/8	8'	791
Use 0.5 lb/ft evaporator refrigerant charge for receiver sizing.		12'	1,222
		Solid End Panel	30




# Reveal Merchandiser® ORMC75(L/M)-MX Specs

Open Multi-Decks (75" Height)

ORMC75(L/M)-MX: (L=Low, M=Medium Sill Height)-MX=Meat eXclusive

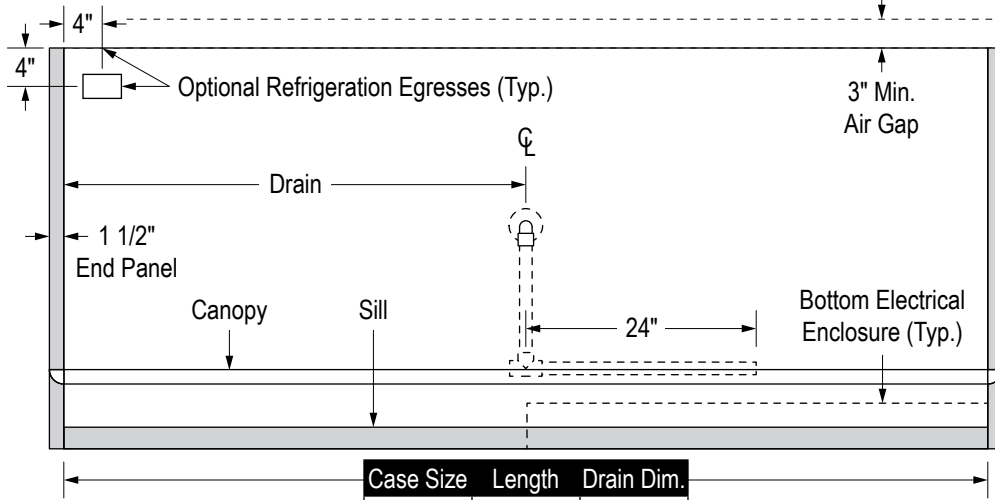

Case Size	Length	Drain Dim.
4'	48"	24"
6'	72"	36"
8'	96"	48"
12'	144"	72"

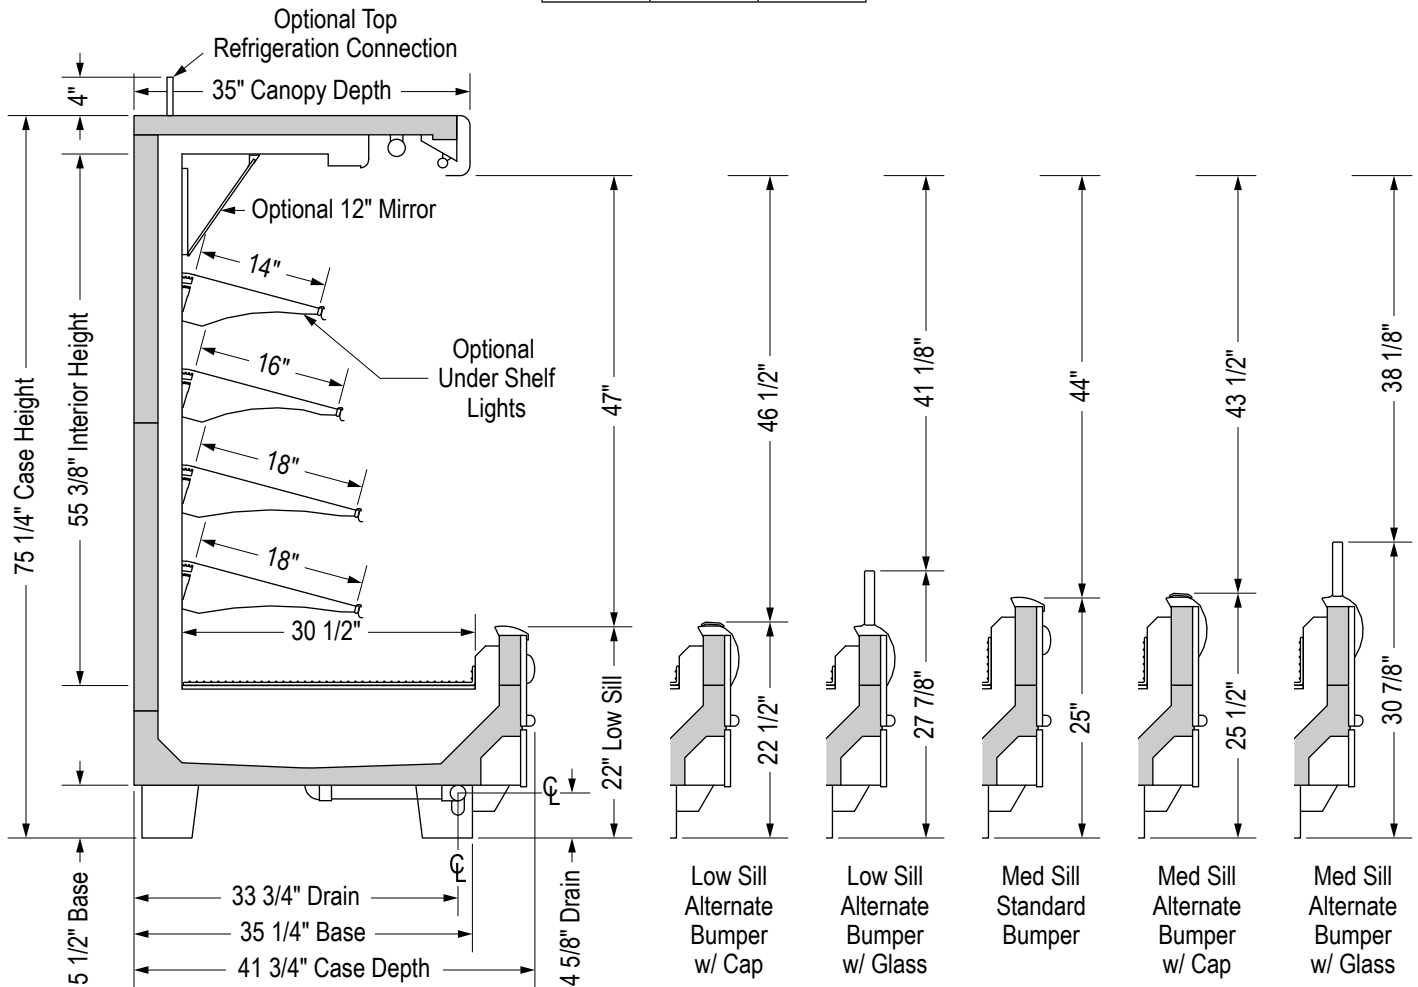

1/8/19

Specifications are subject to change without notice. All dimensions are nominal.  
Case designed to operate in an ambient temperature of 75°F and relative humidity of 55% or lower.



Zero Zone, Inc. | 110 N Oakridge Drive | North Prairie, WI 53153-9792  
Toll Free: 800-247-4496 | Fax: 262-392-6450  
www.zero-zone.com

© 2019 Zero Zone, Inc.




Intertek




# Reveal Merchandiser® ORMC80(L/M)-MX Specs

Open Multi-Decks (80" Height)

ORMC80(L/M)-MX: (L=Low, M=Medium Sill Height)-MX=Meat eXclusive

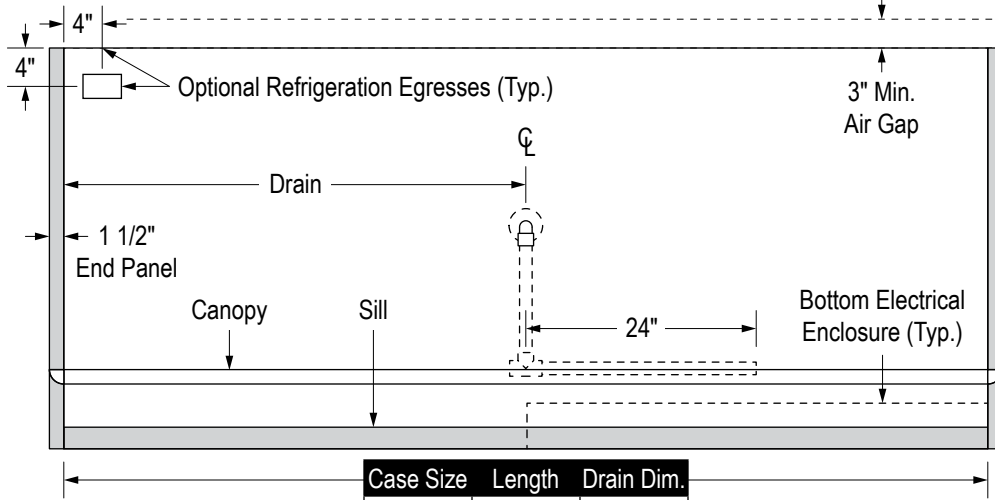

Case Size	Length	Drain Dim.
4'	48"	24"
6'	72"	36"
8'	96"	48"
12'	144"	72"

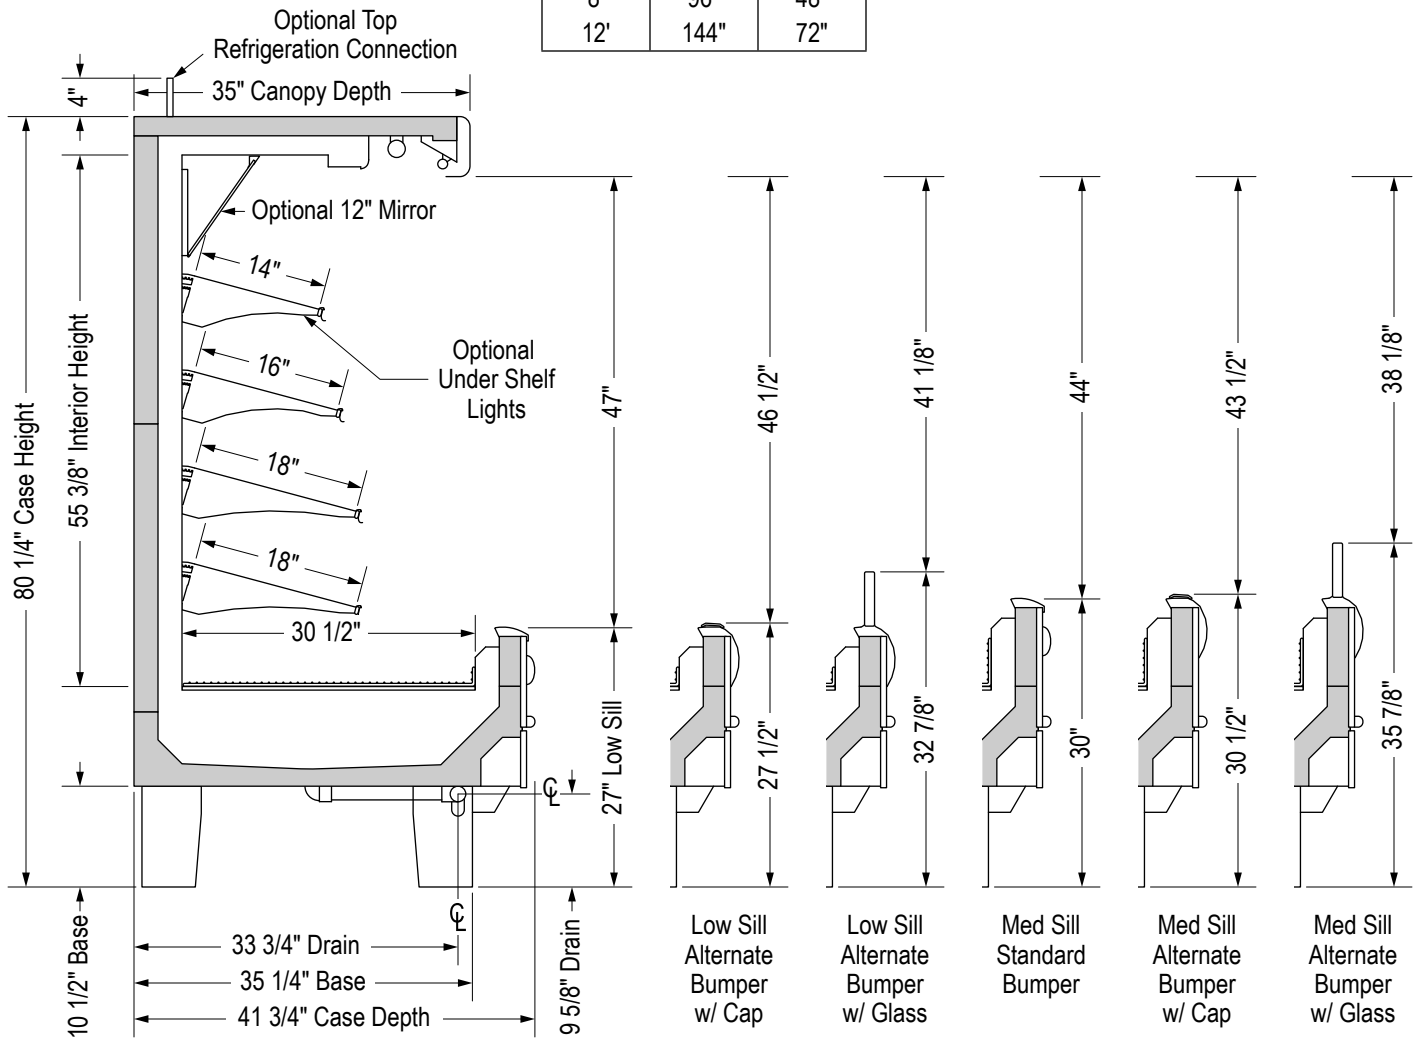

1/8/19

Specifications are subject to change without notice. All dimensions are nominal.  
Case designed to operate in an ambient temperature of 75°F and relative humidity of 55% or lower.



Zero Zone, Inc. | 110 N Oakridge Drive | North Prairie, WI 53153-9792  
Toll Free: 800-247-4496 | Fax: 262-392-6450  
www.zero-zone.com

© 2019 Zero Zone, Inc.



Intertek