


## OMC SPECIFICATION SHEET Open Multideck Mobile Merchandiser

## Features and Benefits:

- Patented case design holds food products at Food Code required temperatures below 41° without freezing rear product by distributing coldest air to air curtain.
- Twin thermal pane glass front and side panels provide increased product visibility, easy cleanability and reduced heat gain.
- 100% CFC-free urethane foam and steel construction for maximum energy efficiency and product durability.
- Condensate pan evaporates accumulated water and eliminates the need for a floor drain.
- T-8 bulbs are energy efficient and provide brilliant sign and product display.

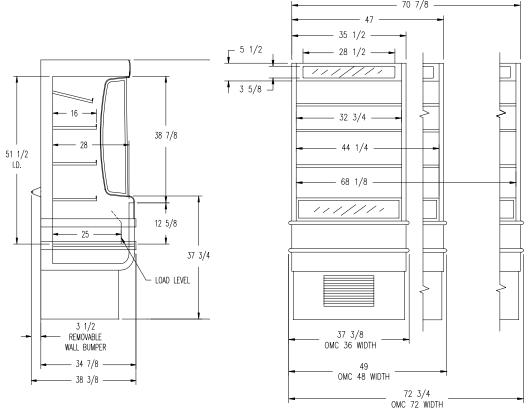

OMC48 208V NEMA L14-20P PLUG



OMC36 OMC48 NEMA 5-30P PLUG



OMC72 NEMA L14-30P PLUG



## Standard Features:

- White interior and exterior
- 1" Black bumpers on front and side of case
- Case wall bumpers
- White backlit sign face with black block letters
- R-404A
- Electronic Controller
- Standard commercial grade casters
- Four white solid shelves-two position
- 1-1/4" High product stops

## **Optional Features:**

- Custom painted or vinyl laminate exterior.
- Custom painted interior and/or shelving
- Custom graphics on backlit sign face
- Additional shelvina
- Custom bumper colors
- Price tag molding

Model	Weight w/shelves pounds	ELECTRICAL			H.P.	Refrig.	Cubic Feet
		Incoming Supply	Min Circuit Amps	AMPS RLA		Kenig.	Capacity
OMC 36	547	115V-1 PHASE -60 HZ	30	19.6	3/4	R-404A	18
OMC 48	657	115V-1 PHASE -60 HZ 208V-1 PHASE -60 HZ	30 20	21.6 13.9	1	R-404A	24
OMC 72	740	208/230-115V-1 PHASE-60HZ	30	19.0	2	R-404A	37

Case designed to operate in an ambient air temperature of 75°F or lower and relative humidity of 55% or lower.

All specifications are subject to change without notice.



