



Crystal Merchandiser® RVMC24 Hybrid™ Specs

Medium Temp Hybrid™ Reach-Ins with 24" x 74" CoolView® Ultra™ Doors

R-404A Refrigerant

R-448A Refrigerant

Standard Package

Refrigeration Data	
Refrigerant Charge (lbs.) ¹	
Zero Zone Condensing Unit #	
Condensing Unit Crated Weight (lbs.)	
Electrical & Energy Data ^{2,3,4}	
MOCP (amps) ^{5,7}	
MCA (amps) ^{6,7}	
Daily Energy Use (kWh)	
Rejected Heat (Btu/h) ⁸	
Electrical & Energy Data ^{2,3,4}	
MOCP (amps) ^{5,7}	
MCA (amps) ^{6,7}	
Daily Energy Use (kWh)	
Rejected Heat (Btu/h) ⁸	

2-Door	3-Door	4-Door	6-Door
4.0	4.0	6.0	6.2
69-10042	69-10221	69-10324	69-10045
61	69	66	120
With Condensate Removal System			
15	15	15	15
7.3	7.7	12.8	14.6
5.9	9.9	10.1	15.6
832	1,402	1,441	2,223
Without Condensate Removal System			
15	15	15	15
5.7	7.7	6.8	8.6
5.7	9.6	9.7	15.0
803	1,359	1,384	2,137

2-Door	3-Door	4-Door	6-Door
4.0	4.0	6.0	6.2
69-9933	69-10222	69-10235	69-10237
61	69	66	120
With Condensate Removal System			
15	15	15	15
7.3	7.7	12.8	14.6
5.3	9.1	9.4	14.5
760	1,292	1,334	2,064
Without Condensate Removal System			
15	15	15	15
5.7	7.7	6.8	8.6
5.1	8.8	9.0	13.9
732	1,249	1,276	1,979

High Humidity Package⁹

Refrigeration Data	
Refrigerant Charge (lbs.) ¹	
Zero Zone Condensing Unit #	
Condensing Unit Crated Weight (lbs.)	
Electrical & Energy Data ^{3,4,10}	
MOCP (amps) ^{5,7}	
MCA (amps) ^{6,7}	
Daily Energy Use (kWh)	
Rejected Heat (Btu/h) ⁸	
Electrical & Energy Data ^{3,4,10}	
MOCP (amps) ^{5,7}	
MCA (amps) ^{6,7}	
Daily Energy Use (kWh)	
Rejected Heat (Btu/h) ⁸	

2-Door	3-Door	4-Door	6-Door
4.0	4.0	6.0	6.2
69-10042	69-10324	69-10324	69-10045
61	66	66	120
With Condensate Removal System			
15	15	15	25
13.0	13.3	13.6	15.8
7.9	9.9	12.7	21.4
1,127	1,404	1,802	3,040
Without Condensate Removal System			
15	15	15	20
7.0	7.3	7.6	9.8
7.7	9.6	12.3	20.8
1,098	1,361	1,745	2,954

2-Door	3-Door	4-Door	6-Door
4.0	4.0	5.1	6.7
69-9933	69-10235	69-10235	69-10232
61	66	66	150
With Condensate Removal System			
15	15	15	20
7.7	13.3	13.6	16.6
7.1	9.9	12.7	17.7
1,012	1,404	1,802	2,522
Without Condensate Removal System			
15	15	15	15
5.7	7.3	7.6	10.6
6.6	9.6	12.3	17.1
983	1,361	1,745	2,436

Physical Data

Case Calculations	
Facings (ft. ²)	
Packout (ft. ³) 22" Shelves	
Weight (lbs.) ¹¹	

2-Door	3-Door	4-Door	6-Door
23.7	35.2	46.7	69.8
42.8	63.6	81.5	121.8
775	933	1,020	1,254

2-Door	3-Door	4-Door	6-Door
23.7	35.2	46.7	69.8
42.8	63.6	81.5	121.8
775	933	1,020	1,254



Notes:

- Refrigerant charge includes combined condensing unit and case charges.
- Data based on Zero Zone ChillBrite® 4 LED lighting, Zero Zone CoolView® Ultra™ French-swing doors, and SSC electronic fan motors. See separate reach-in case spec sheets for more details.
- 208V 4-wire service; 115/208V-1PH-60HZ; red & black power, white neutral, green ground. Buck/boost transformer available for low voltage conditions.
- Optional main service disconnect is available upon request.
- MOCP (Maximum Over-Current Protection) is the maximum circuit breaker size that can be used to properly protect the product.
- MCA (Minimum Circuit Ampacity) is used to calculate the minimum wire size. This is selected so wires will not overheat in typical operating conditions and prevent nuisance circuit breaker trips.
- Zero Zone recommends that a circuit breaker size should be larger than the MCA, but smaller than or equal to the MOCP. For example, if the equipment is listed having an MCA of 36.8 amps and an MOCP of 45 amps, a 40 amp or 45 amp circuit breaker would be acceptable.
- Adequate ventilation must be provided to dissipate rejected heat from the top of the unit for proper performance. Clearance of less than 30" above the top of the shroud to the ceiling requires special design considerations. See Zero Zone Hybrid™ Installation & Operation Manual for specific details.
- High Humidity Package includes high-wattage anti-sweat components that prevent condensation on doors and components in ambient conditions up to 85°F and relative humidity of 70%.
- Data based on Zero Zone ChillBrite® 4 LED lighting, Zero Zone CoolView® Ultra™ French-swing doors with heated glass and rails, and SSC electronic fan motors.
- Does not include weight of condensing unit. Weights include 2 end panels at 35 lbs. per pair.



Crystal Merchandiser® RVMC24 Hybrid™ Specs

Medium Temp Hybrid™ Reach-Ins with 24" x 74" CoolView® Ultra™ Doors

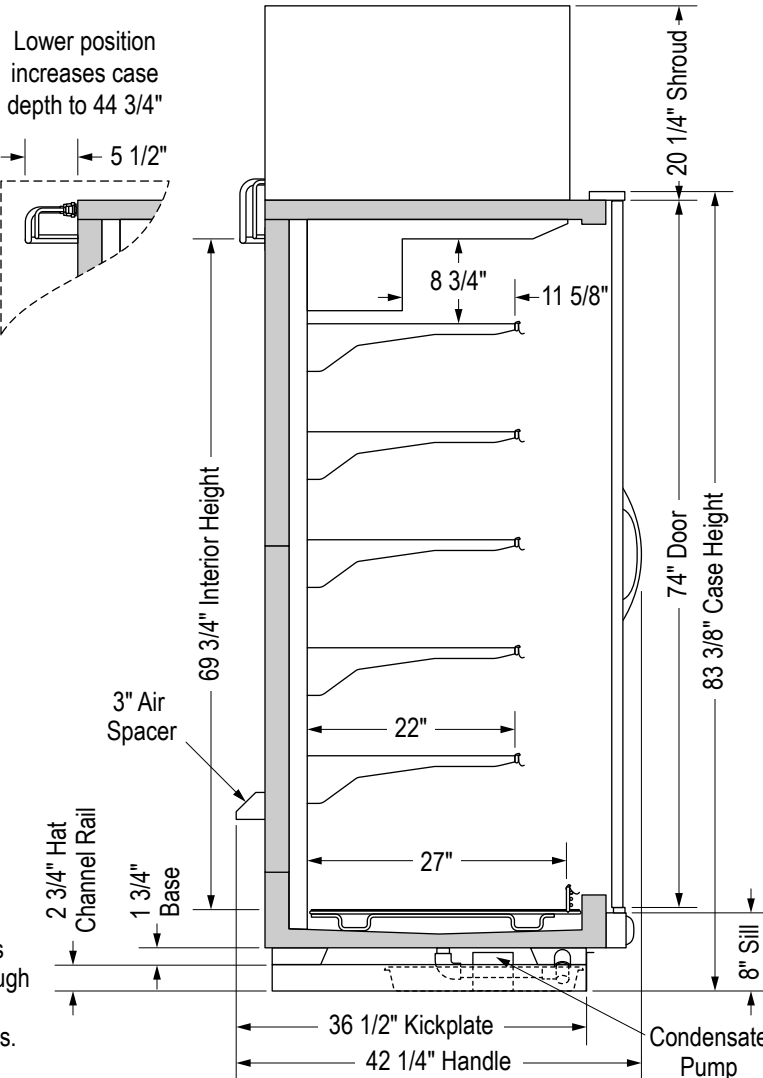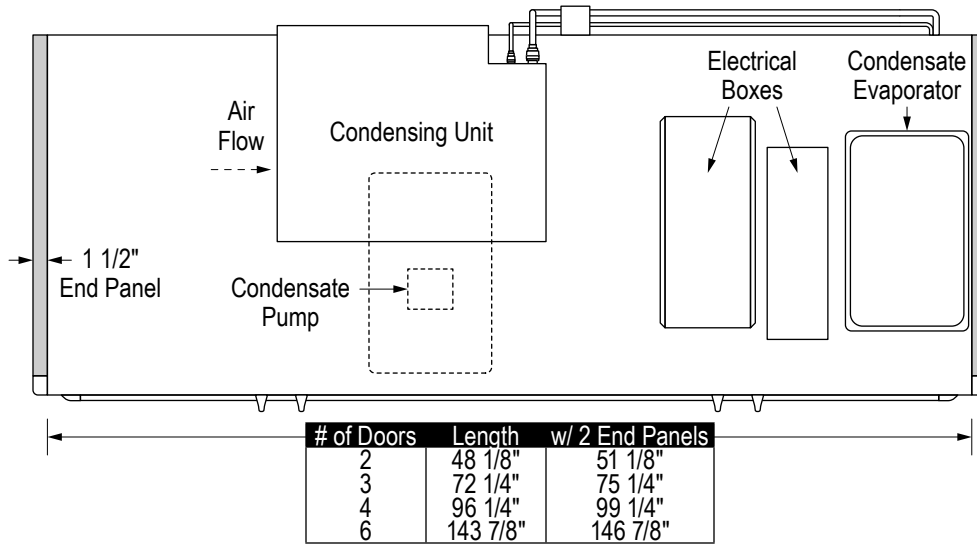

Optional base configurations are available to fit case through doorways as low as 80". Consult the factory for details.

SS-82-G

Specifications are subject to change without notice. All dimensions are nominal. Case designed to operate in an ambient temperature of 75°F and relative humidity of 55% or lower. See separate remote case spec sheets for additional details.

3/2/2023



Zero Zone, Inc.
800-247-4496 • www.zero-zone.com
© 2023 Zero Zone, Inc.

